

# SLIM LIGHT



## Application

Apply to 3.5-10 cm depth single-sided light box at airports, metros, banks, buildings and shopping malls, etc.


## Features

1. Ideal for 3.5-6cm single-sided ultra thin light box.
2. Each one cuttable, much more flexiable.
3. Beaming angle is 170° by the optical lens, lighting uniformly even in big light box.
4. Adopting the light source of SMD2835 LED.
5. Easily installation and convenient maintenance,by special connectors.
6. CE, RoHS, UL certified.


## Parameters

Items	Parameter
Part Number	SLIM LIGHT
CCT (K)	7000
Beaming Angle(°)	170
CRI(Ra)	≥75
Luminous Flux(lm)	55
Voltage(V)	DC12V
Power(W)	0.72
Dimension(mm)	80*20*6.6
Weight (g)	3.0
Working Tem.(°C)	-25~+60
Storage Tem.(°C)	-25~+70
Protection Grade	IP65


## Dimension

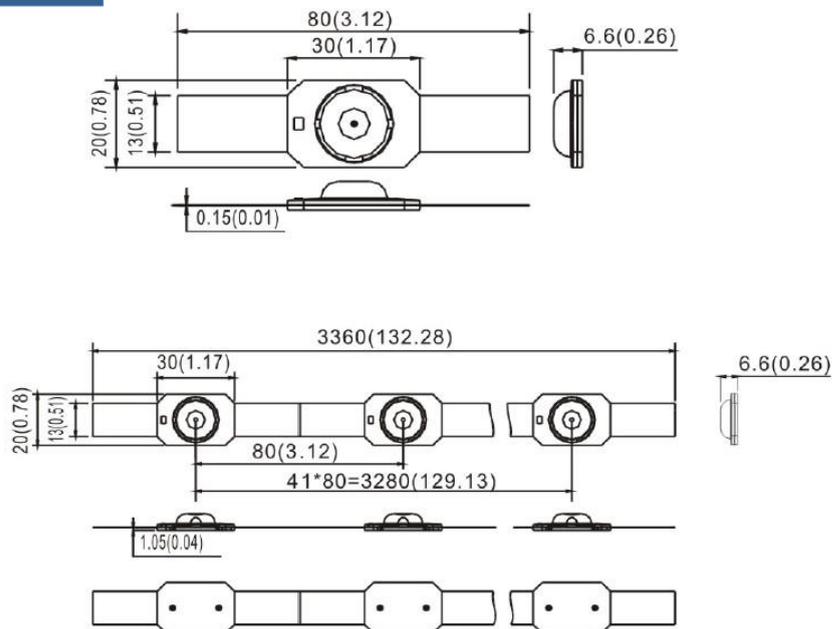


## Beaming Angle

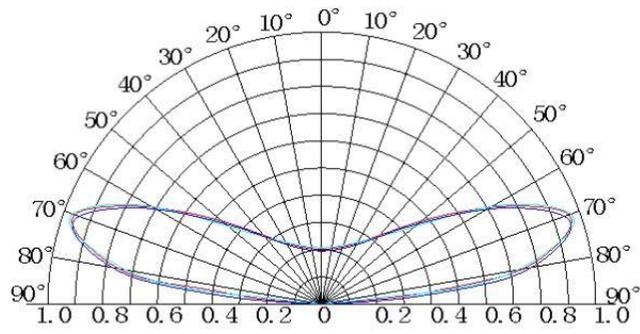

## Wire Connection

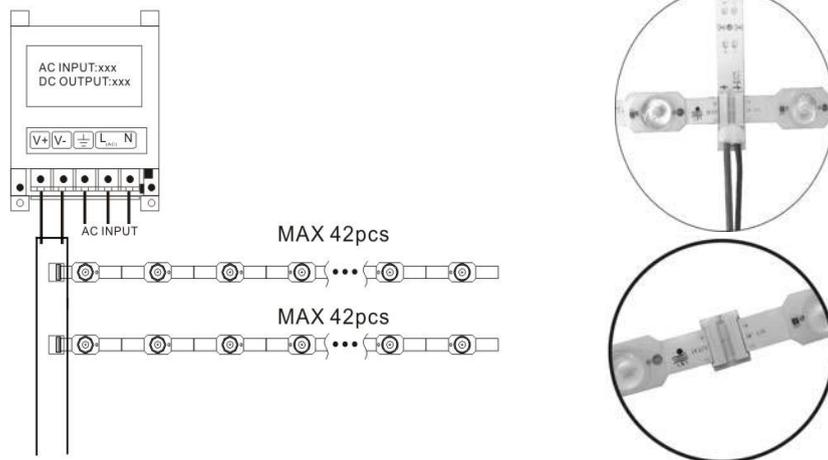


## Packaging




210 pcs in a roll



each roll in a box



10 boxes in a carton



2100 pcs in a carton

## Packing Specification

### 1. Packing information

Model	SLIM LIGHT
Box Dimension (mm)	340*340*35
Carton Dimension (mm)	380*360*365
Quantity Per Carton (pcs)	2100
Net Weight (kg)	6.09
Gross Weight (kg)	12

2. Due to the packing manner difference, please adhere to the original products in case of discrepancy found between the picture and actual product.

## Warning

1. Disassembling or modifying the product is forbidden.
2. Installation with power on is forbidden.
3. Any organic solvent chemical is forbidden.
4. Acidic or alkaline adhesive is forbidden when install, neutral glass cement could be used for installation purpose, make it drying in opening sites for four hours.
5. Isolation and corrosion prevention on all wiring points and wire ends.
6. Make sure the power wire is big enough and ensure the voltage and connections are all correct before power on.
7. This products shall be used in a sign, do not expose it in opening sites.
8. Installation, maintaining shall be done by professional staff.
9. 42 pcs in a serial connection maximum, 294 pcs connected on one power bar maximum.

## Declaration

1. Warranty: 5 years.
2. To ensure the safety, the broken wires need to be changed by the manufacturer or the service agent, or by the staff with the similar qualification
3. The given data in the specification is the laboratory data, there may be discrepancy found in the actual products.
4. The given drawings in the specification are only for reference, there may be discrepancy found in the actual products.
5. The products are subject to change without prior notification.

Products are certified by the following organisms:

